




APS OR-DT-P Power Transformer

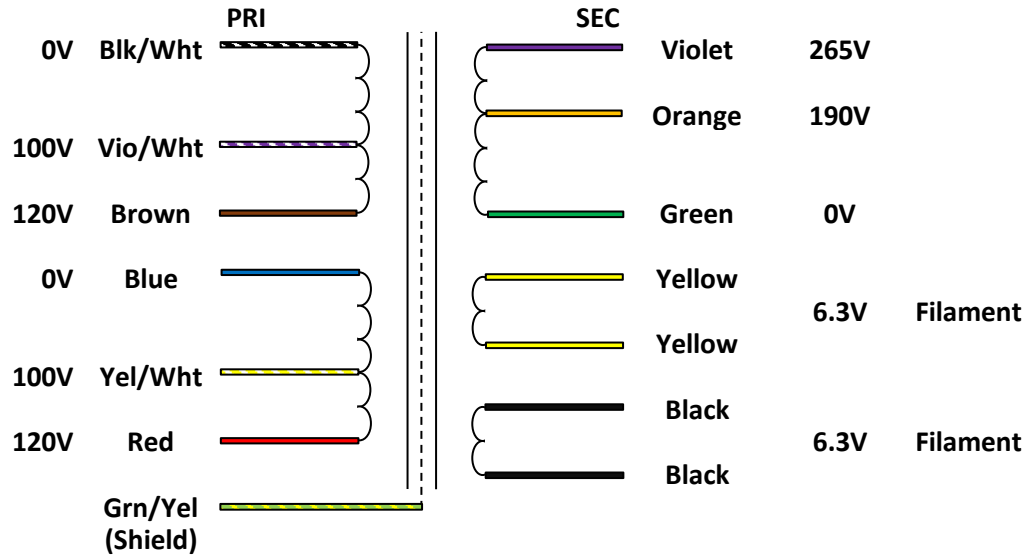

120V Primary Wiring	100V Primary Wiring	220V Primary Wiring	230/240V Primary Wiring
AC IN1: Blk/Wht + Blue AC IN2: Brown + Red FLOAT: Vio/Wht, Yel/Wht	AC IN1: Blk/Wht + Blue AC IN2: Vio/Wht + Yel/Wht TIE & FLOAT: Brown + Red	AC IN1: Blk/Wht AC IN2: Yel/Wht TIE & FLOAT: Brown + Blue FLOAT: Vio/Wht, Red	AC IN1: Blk/Wht AC IN2: Red TIE & FLOAT: Brown + Blue FLOAT: Vio/Wht, Yel/Wht

Note: both primary windings must be used. Contact Mercury if you have any questions.